

PO Box 37900, Al-Quoz Industrial Area 3, Dubai, UAE

Tel : +971 4 347 0427/477 (Al-Quoz) Fax : +971 4 347 1713

Tel : +971 4 880 1212 (Jebel Ali) Fax : +971 4 880 1033 Email: info.dubai@cemex.com

CEMEX FALCON LLC PO Box 66429

Jebel Ali Industrial Area Dubai, UAE

Tel : +971 4 880 1212 Fax : +971 4 880 1033

PO Box 72071 Mussafah Industrial Area Abu Dhabi, UAE

Tel : +971 2 551 5501 Fax : +971 2 551 5560


Email: info.abudhabi@cemex.com

w w w . c e m e x . a e www.readymix4u.ae Copyright © 2018 CEMEX Research Group, AG







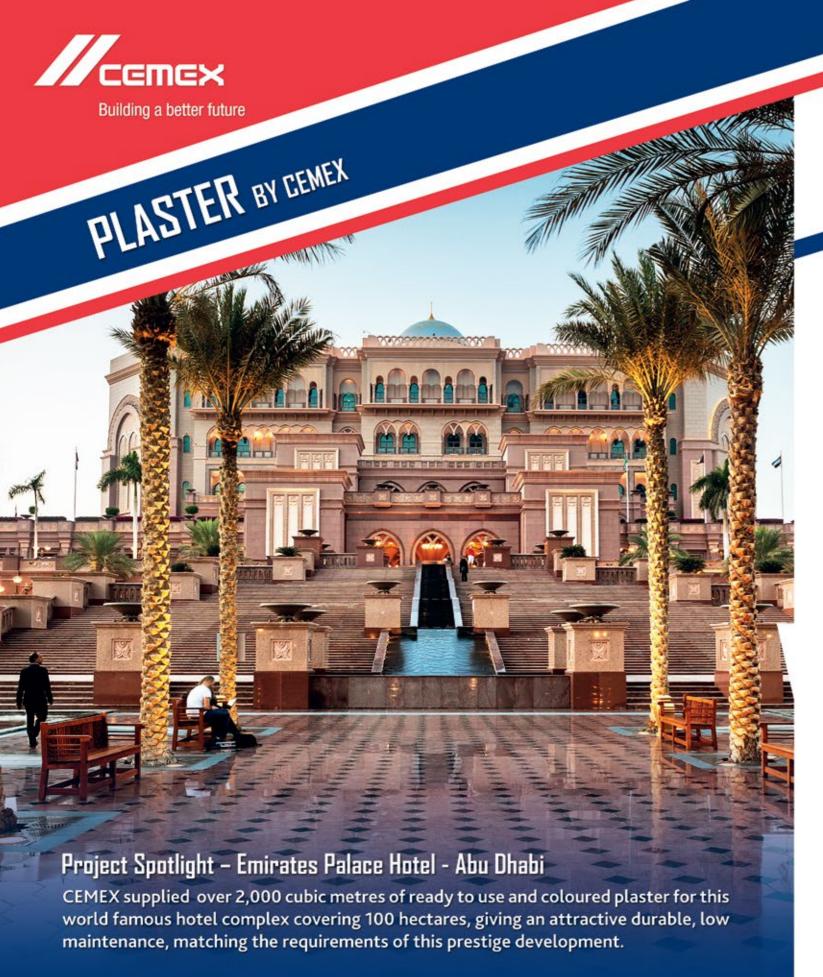

CEMEX plasters are an ideal solution to providing a high quality, durable and cost effective finish to structures. CEMEX plasters can be produced in a wide range of colours and our Turath plaster is specially designed to match the local traditional architecture, providing a natural appearance.

Features and Benefits

Delivered ready to use

- L Mixed to the same formulation consistently
- ∟ Eliminates plant and labor for mixing on site
- ∟ Usable for a full working day

Available in a range of colors


- L No need to paint
- ∟ Will not fade, peel or flake like a paint
- ∟ Colour is consistent throughout depth of plaster

PERFORMANCE FOOTPRINT



CONCRETE

CONCRETE

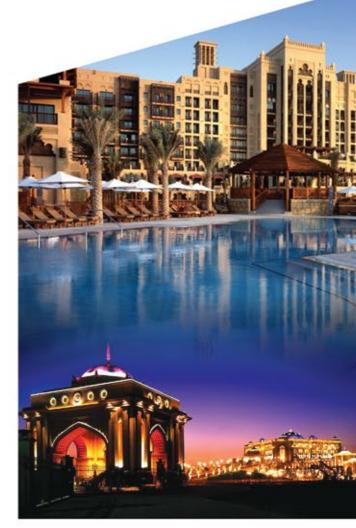

TECHNICAL DATA

| Concrete Grade (N/mm²) | 05 to 20 |
|---|-------------------|
| Durability ¹ (RCP, WP, WA) | Not Required |
| Workability Slump (mm) | 75 to 125 |
| Workability Retention (Hours) | up to 8 |
| Maximum Aggregate Size (mm) | 5 |
| Typical Hardened Density (Kg/m ³) | 2250 |
| Cement Types ² | OPC, White Cement |
| Supplementary Cementitious Materials ³ | |
| Colours | Grey or Colored |