

Toll Free Number. 800CEMEX
Cash Customer Hotline. 800CEMEX 4U

Dubai

Ready-Mix Concrete
CEMEX TOPMIX LLC
PO Box 37900, Al-Quoz
Industrial Area 3, Dubai, UAE
Tel : +971 4 347 0427/477 (Al-Quoz)
Fax : +971 4 347 1713
Tel : +971 4 880 1212 (Jebel Ali)
Fax : +971 4 880 1033
Email: info.dubai@cemex.com

Dubai

Cement & Slag (GGBS)
CEMEX FALCON LLC
PO Box 66429
Jebel Ali Industrial Area
Dubai, UAE
Tel : +971 4 880 1212
Fax : +971 4 880 1033

Abu Dhabi

Ready-Mix Concrete
CEMEX SUPERMIX LLC
PO Box 72071
Mussafah Industrial Area
Abu Dhabi, UAE
Tel : +971 2 551 5501
Fax : +971 2 551 5560
Email: info.abudhabi@cemex.com

www.cemex.ae
www.readymix4u.ae


Copyright © 2018 CEMEX Research Group, AG



ICF + EVOLUTION

CEMEX
Building a better future

ICF + EVOLUTION

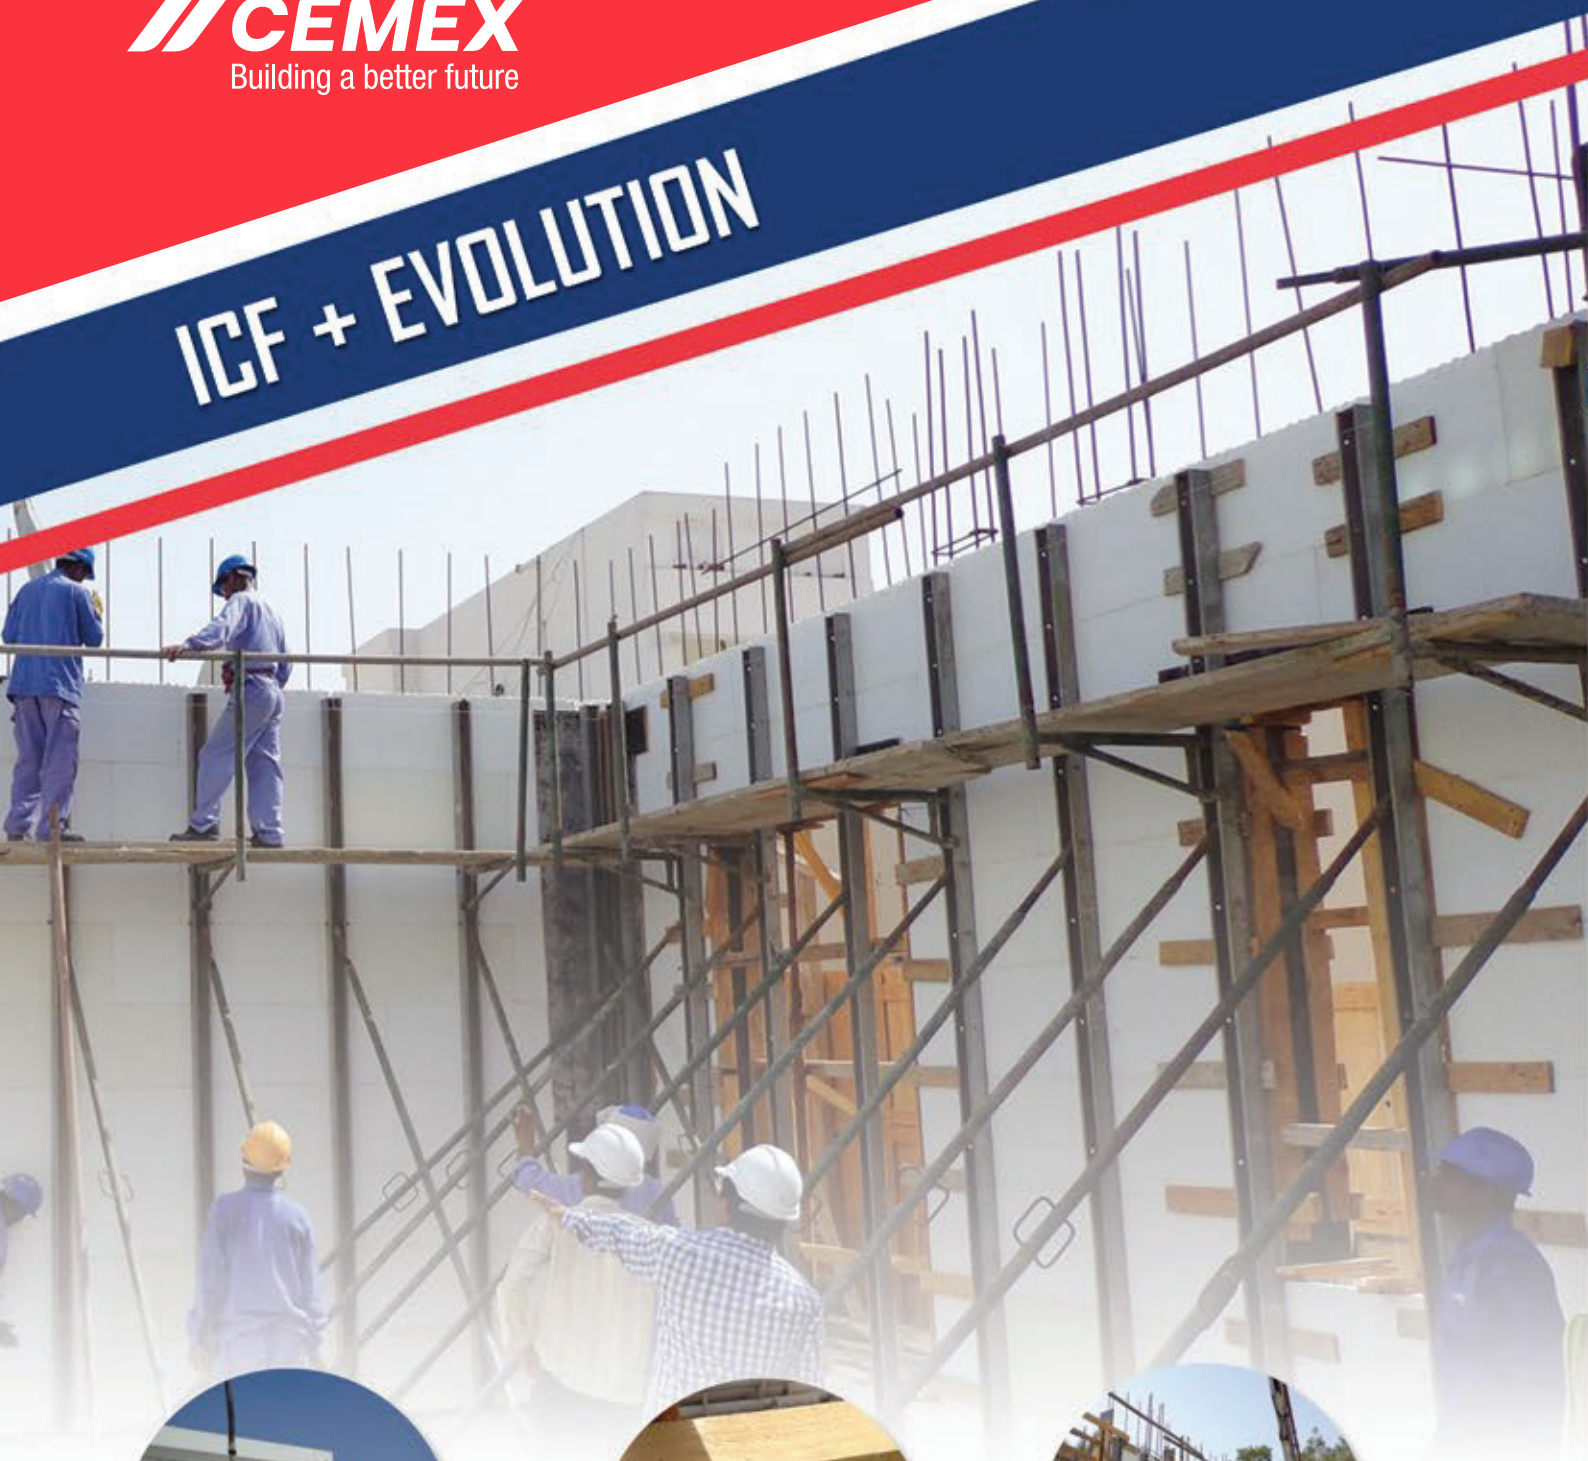

ICF (Insulated Concrete Forms) + CEMEX Evolution is a rapid, sustainable, cost effective solution for small to medium construction projects.



ISO 9001
ISO 14001
ORSAS 18001
BUREAU VERITAS
Certification



CX EVOLUTION + INSULATED CONCRETE FORMS (ICF) Is our solution for your projects with a tight and very demanding finishing schedule. Consist of two panels of foam held together with cross ties or "webs" which creates a block.. The block is filled with CX EVOLUTION Concrete providing a load bearing structure that will provide superior structural performance compared to traditional systems. This system can provide additional benefits like reducing your DEWA Bill by 35% to 40% and can reduce construction time by up to 25%.


Suitable For:

- ▮ Bearing Walls Panels
- ▮ Non-Bearing or Partitioning Walls
- ▮ Floor or Slab Panels

Advantages:

- ▮ Fire resistance up to 120 minutes
- ▮ Acoustic performance up to 50 Db
- ▮ Flexibility of design (No beam system required)
- ▮ Superior K (0.084) value compared with concrete blocks
- ▮ Increase site productivity by speeding construction time (120 m2 per day output)
- ▮ Can score points for LEED or ESTIDAMA.

THE ANATOMY OF AN ICF BLOCK

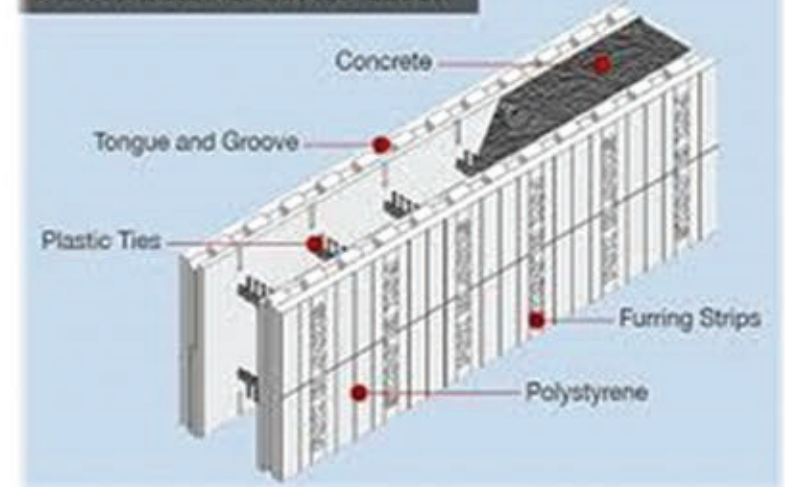

PERFORMANCE FOOTPRINT



TECHNICAL DATA

Flexural Grade(N/mm ²)	30 to 60
Flow (mm)	550 to 650
Flow Retention (min)	90 to 120
Maximum Aggregate (mm)	10 – 20
Typical Density (Kg/m ³)	2,400
Cement Type	OPC, SRC, MSRCP
Supplementary Cements	GGBS, Microsilica, PFA